

New transmitter with integral display, will now work with all SumoFlo® CPFM-8103-Series Single-Use Coriolis Flow Meter from PSG Biotech. The display transmitter features an 144 x 144mm panel mounted four line display which can simultaneously display:

- Flow rate
- Totalized flow
- Density\*
- Temperature

Additionally, the SumoFlo Integral Display Transmitter, offers re-zero and reset the totalizer capabilities form the front of the display panel. Available in either panel mounted or table-top version, the display transmitter is a durable component, that can be reused since it has no contact with fluids. The SumoFlo Integral Display Transmitter provides users with instantaneous process metrics, enabling operator to identify and respond to process variations and failures quicker with less wasted time and materials.

## Specifications:


- 144 x144 mm panel mounted display
- Tabletop version of transmitter also available
- Four line display
- Re-zero and reset the totalizer functions accessed from the front panel




<sup>\*</sup> Density functionality is not available on SumoFlo® CPFM-8103-U08 model.

## **DIMENSIONS**

## **CELE-8103-D Display**

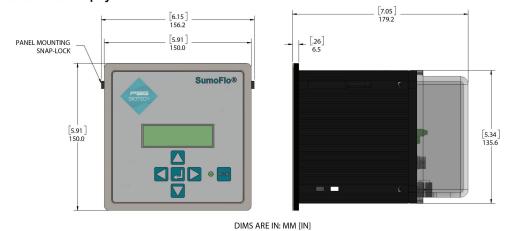

## SUMOFLO FLOW RATE RANGE

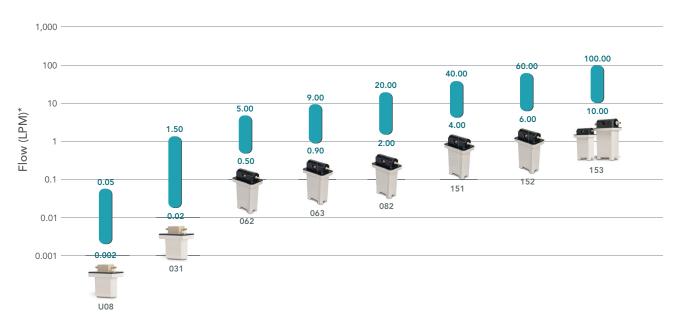

SumoFlo Flow Meter Models Supported	
CSEN-8103-031	CSEN-8103-151
CSEN-8103-062	CSEN-8103-152
CSEN-8103-063	CSEN-8103-153
CSEN-8103-082	CSEN-8103-U08

PBT-M-20004-F-01 © 2024 PSG®, a Dover company
Authorized PSG® Partner:



